

# SUNLINQ™ Portable Solar Panel - 6.5 Watt

SUNLINQ™ is the only solution for portable solar power for all types of outdoor needs. The SUNLINQ™ 6.5 Watt is ideal for hiking, camping, sporting events, on campus and at the beach.

Incorporating solid state, thin-film, PowerFLEX™ solar cells, the SUNLINQ™ 6.5 Watt provides an excellent choice for excursions that require lightweight, flexible, durable portable power.

## Product Specifications (SL-6.5)

Electrical Characteristics*	
SL Product Number	SL-6.5
Typical Current (milliamps) at 11V (at 62°C)	433
Nominal Operating Voltage	12V CLA **
Typical Power (Watts) at STC*	5.5
Maximum Limit for Open Circuit Voltage	15.6V
Maximum Power (Watts)	6.5
Thermal Characteristics	
Power (%/C)	-0.5
Voltage (%/C)	-0.5
Cell Temperature Operating Range	-40° F to 176° F/ -40° C to 80° C
Dimensions and Weight	
Folded	
Length, in (mm)	9 (229)
Width, in (mm)	5 (127)
Thickness, in (mm)	.5 (12.7)
Deployed	
Length, in (mm)	29.125 (740)
Width, in (mm)	10.375 (264)
Thickness, in (mm)	.03 (.762)
Weight	
Weight, lb (kg)	.45 (0.20)
Max Power to weight ratio watt/lb (watt/kg)	14.4 (32.5)


\*Data at Standard Test Conditions (STC)

STC: irradiance level 1000W / m<sup>2</sup>, spectrum AM 1.5 and cell temperature 25° C

Expose the module to sunlight for 1-2 days for best measurement results.

Rating tolerance +/- 15%

\*\*Cigarette Lighter Adapters (CLAs) typically operate best between 11V and 14.5V

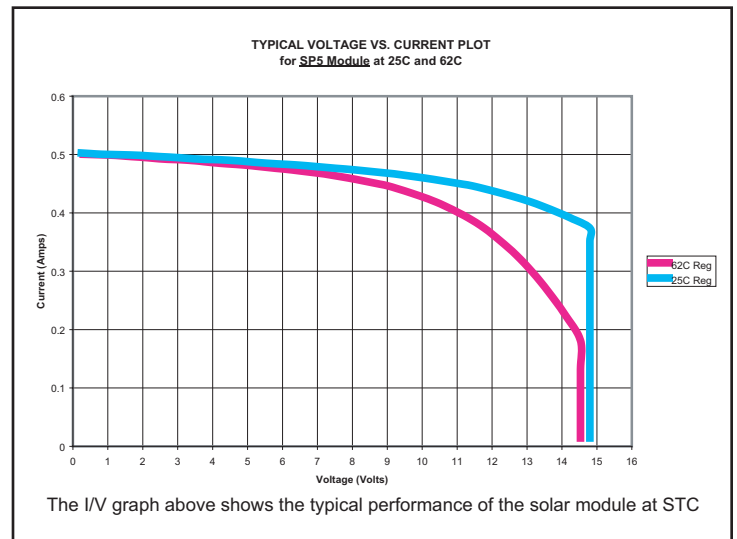

SL- 6.5 Watt



GLOBAL SOLAR  
Systems That Deliver

5575 South Houghton Road, Tucson, Arizona 85747 - Tel. 1+ 520.546.6313 - Fax 1+ 520.546.6318  
website: [www.globalsolar.com](http://www.globalsolar.com) - email: [info@globalsolar.com](mailto:info@globalsolar.com)

Rev 111607